



MDVR MENU TRIGGER ACTIVATION INSTRUCTIONS

STEP 1.

Using the supplied MDVR remote login to the setup menu.



IT SHOULD NOT ASK FOR A PASSWORD. However, if it does ask, the *Password is 8888888.*




STEP 2.

On the MASTER MENU, click on ALARMS.




STEP 3.

In the ALARM SETUP, click on SENSORS.

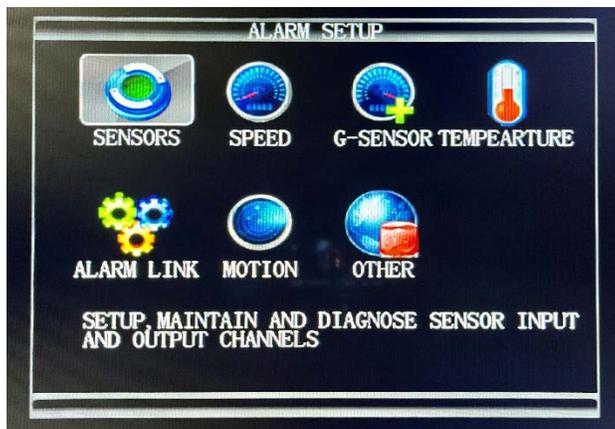



STEP 4.

In the SENSOR SETUP screen, scroll down to ENABLE.

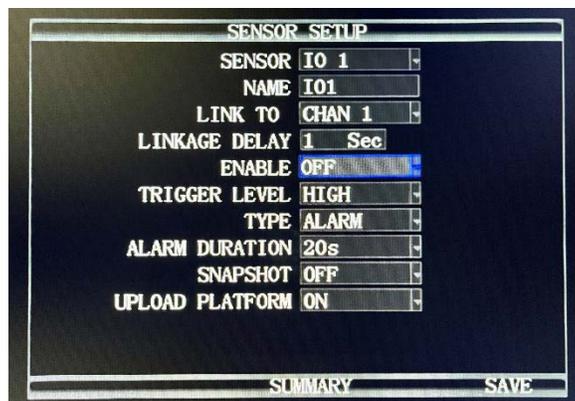


STEP 5.

ENABLE will need to be turned ON from the dropdown menu.

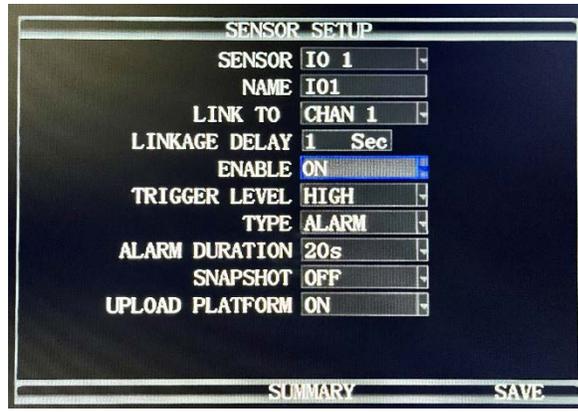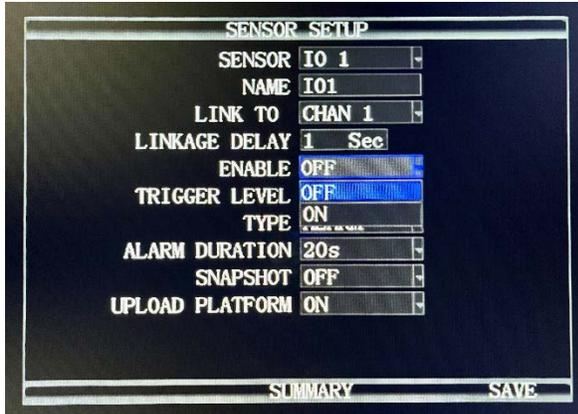


STEP 6. After turning ENABLE to the ON option, scroll to the bottom right and select SAVE.

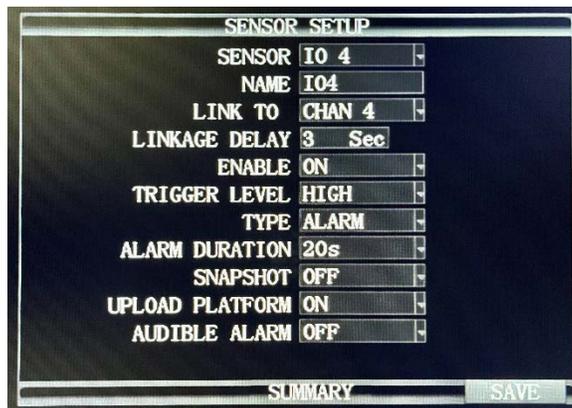



STEP 7.

SYSTEM PROMPT will appear after selecting SAVE. You must then click YES.

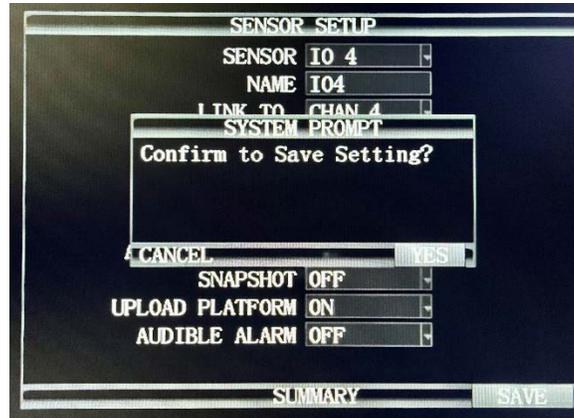


STEP 8.

After you have saved the settings, you will need to repeat the process by first switching the SENSOR at the very top. It will display a dropdown. Select each SENSOR (channel) one at a time and repeat steps 5-7. **DO THIS FOR IO1-IO4.**

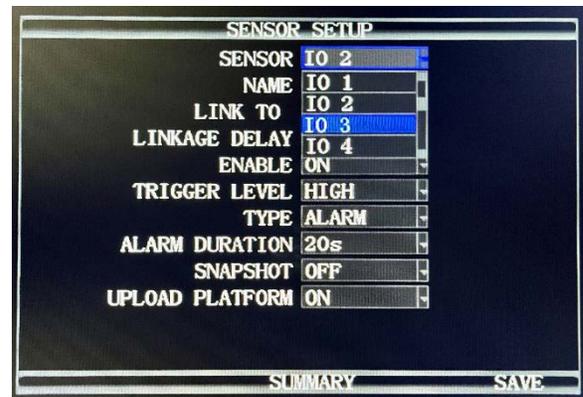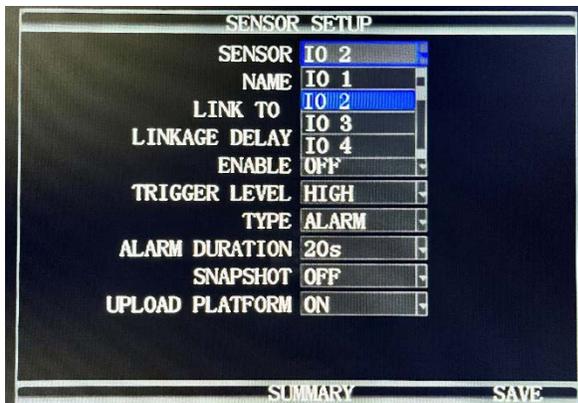

STEP 9.

Once steps 5-7 have been completed for all four channels (IO1-IO4), verify that all channels have ENABLE turned ON.

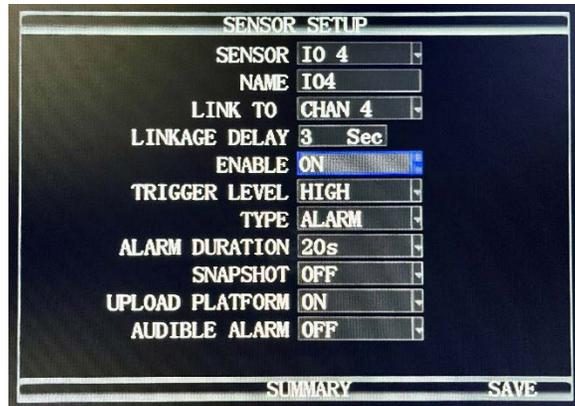

STEP 10.

After saving the settings on all channels (sensors), you will press the return button on your MDVR remote to exit, completing the process.

